






- Form C circuit
- Immediate alarm signal

Application

The AMC-2 Money Clip is designed for installation in cash registers, cash boxes, and at teller's windows. The AMC-2 employs a quiet yet highly developed reliable switch mechanism that insures an immediate alarm signal when triggered and connected to a central station.

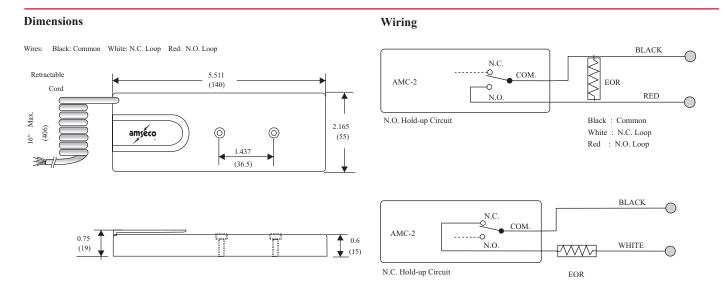

Specifications

	Model	Stock Number	Contact Rating	Contact Type	Cord Max. Length	Contact Resistance	Operating Gap	Operating Temperature Range
	AMC-2	4390001	5 Amps @ 125VAC .4 Amps @ 125VDC 4 Amps @ 30VDC	N.C./ N.O	16"	150m/Ohms	0.19" (0.5mm)	32°F to 120°F (0°C to 49°C)

Potter Electric Signal Co., LLC • St. Louis, MO • Cust Service: 866-240-1870 • Tech Support: 866-956-1211 • Canada 888-882-1833 • www.pottersignal.com